

FIG. 1

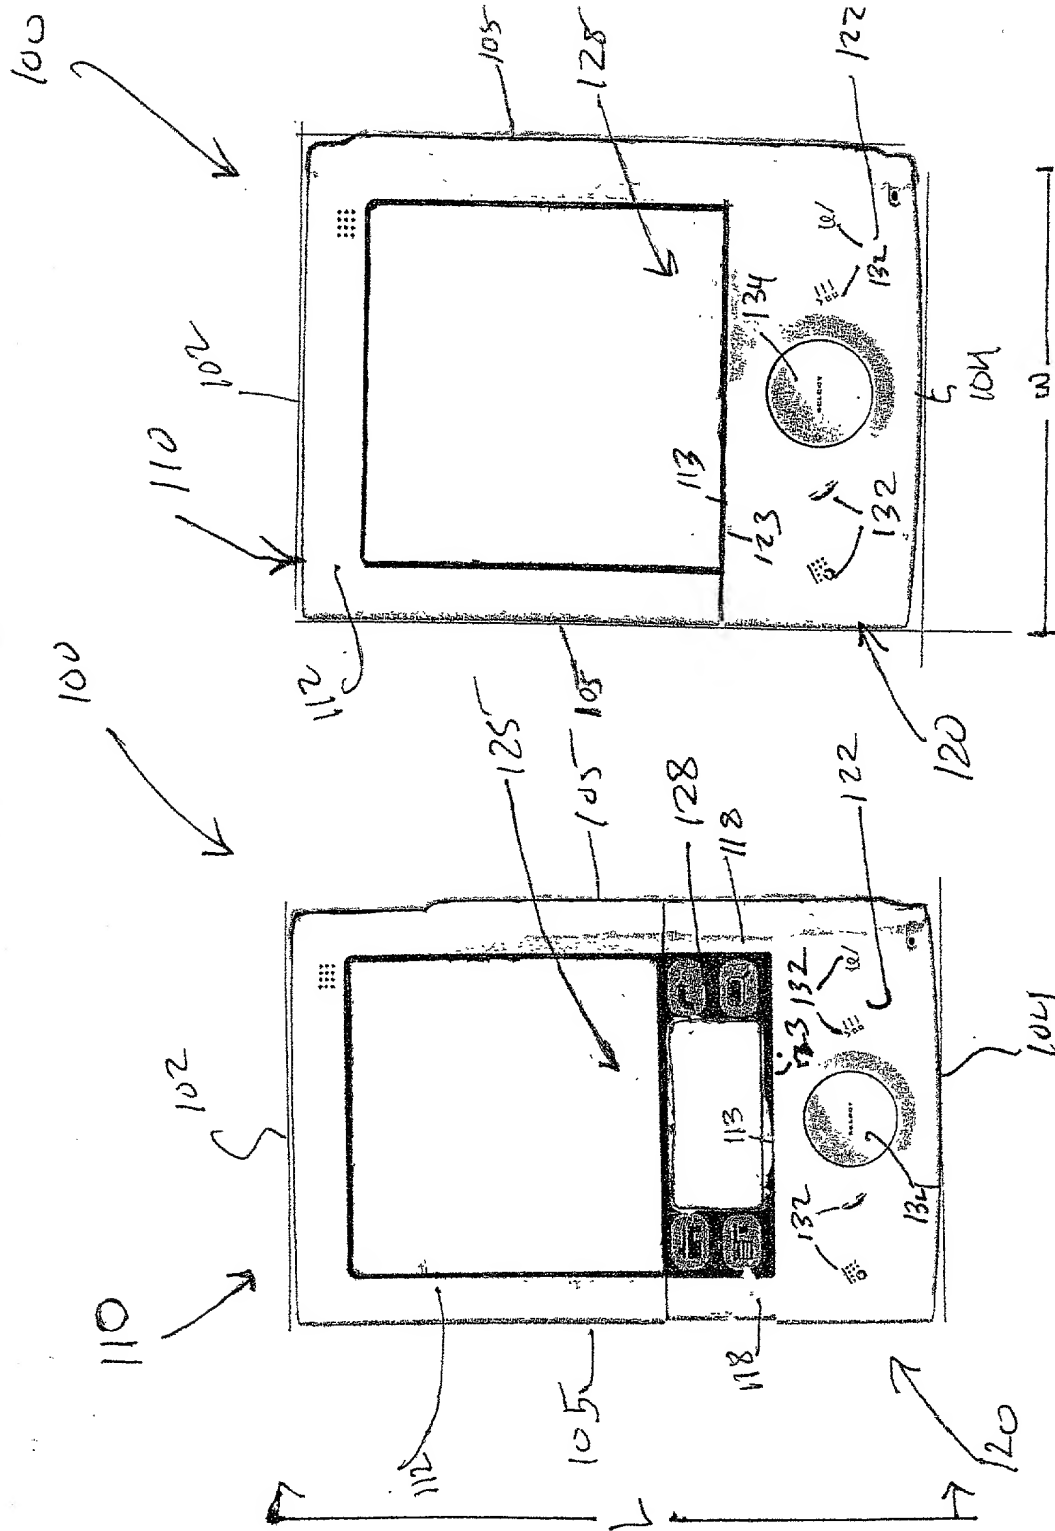


FIG. 1

FIG. 2

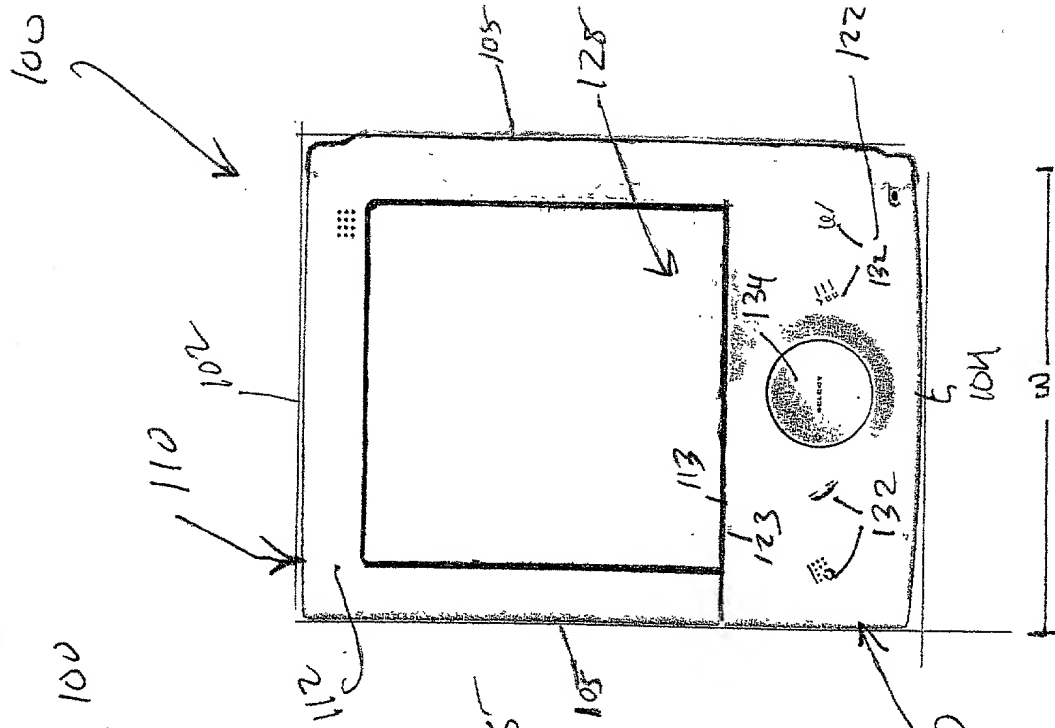


FIG. 2

FIG. 4 is a perspective view of the device 100 in a closed position. The device 100 includes a display 116 and a sensor 130. The display 116 is a touch-sensitive display that displays a graphical user interface (GUI) 116. The sensor 130 is a palm vein scanner that is used to authenticate the user. The device 100 is powered by a battery 162. The device 100 is shown in a closed position, with the display 116 and the sensor 130 visible. The device 100 is a handheld device, such as a smartphone or a tablet.

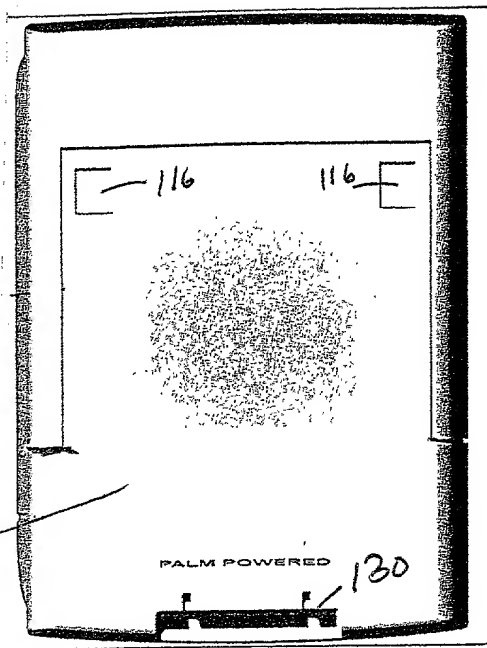


FIG. 4

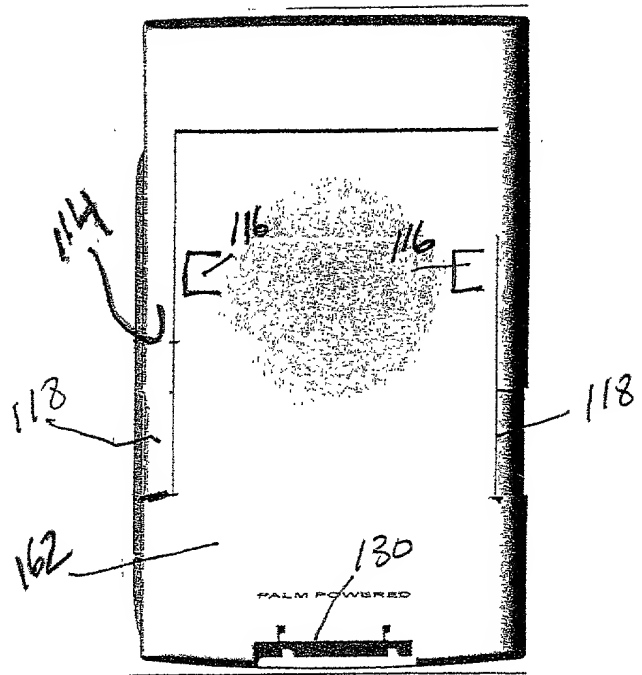


FIG. 3

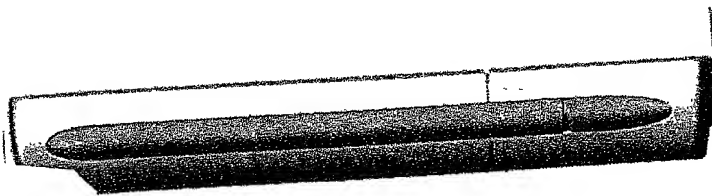


FIG. 7

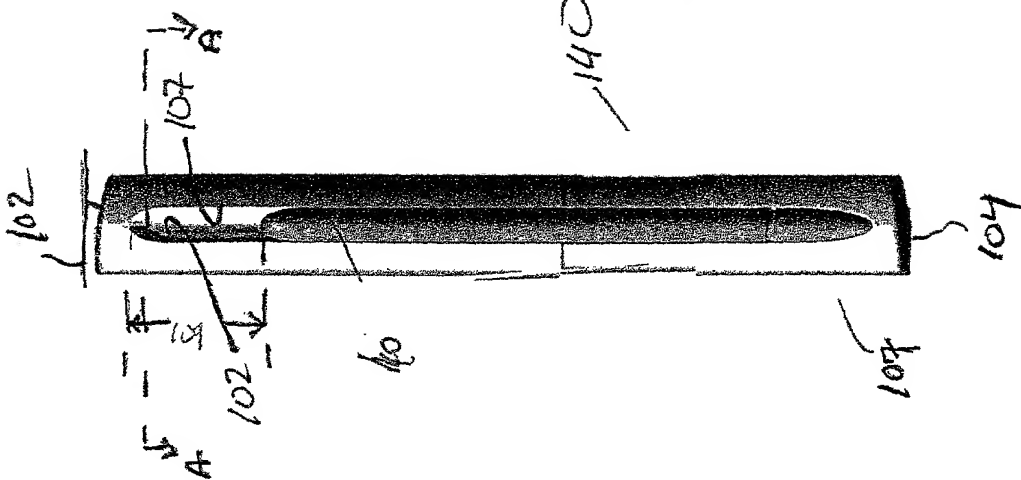


FIG. 5




FIG. 6

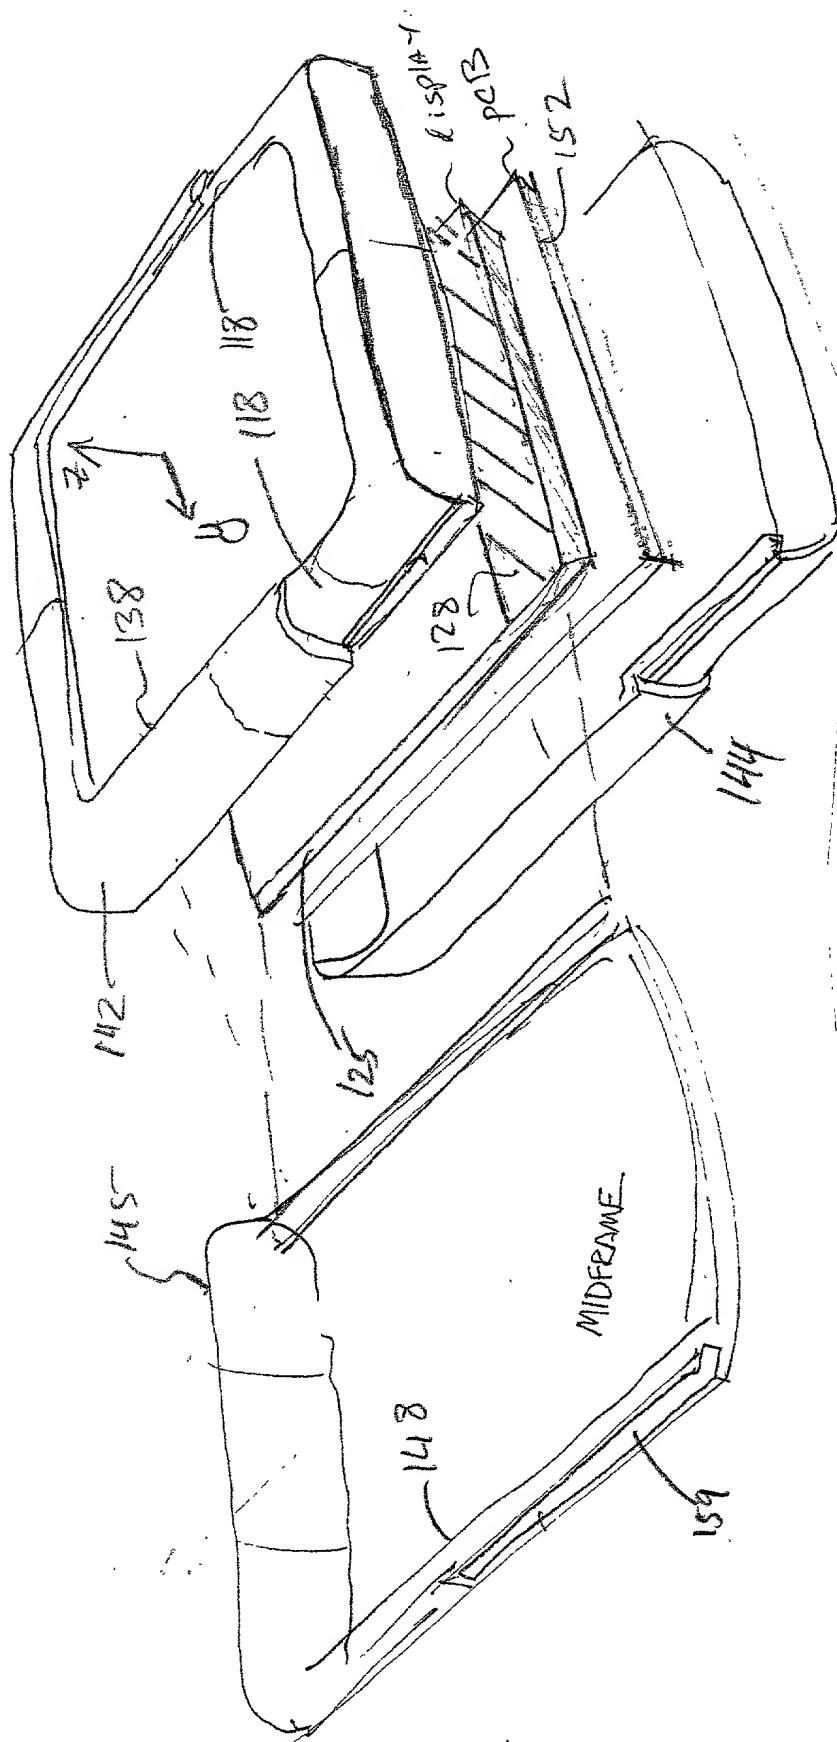


FIG. 8

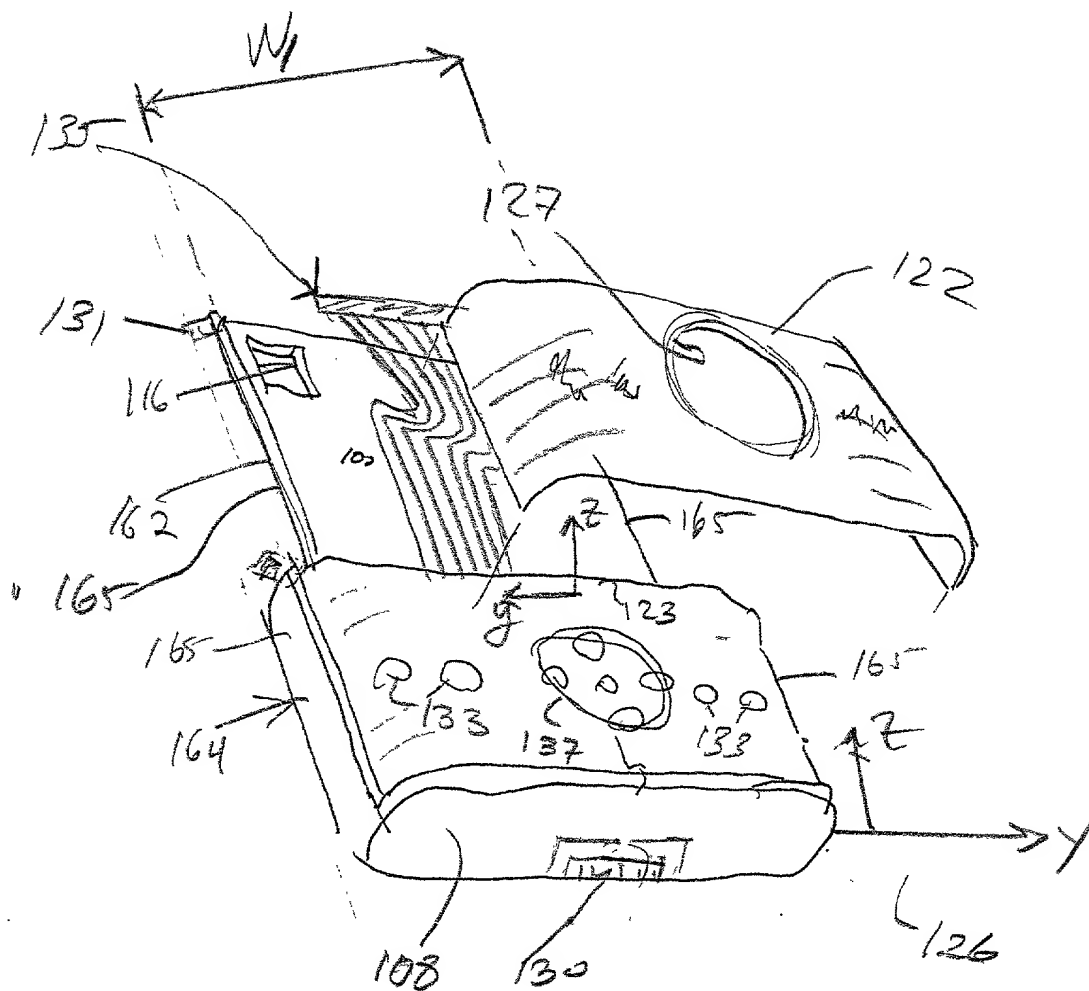


FIG 9

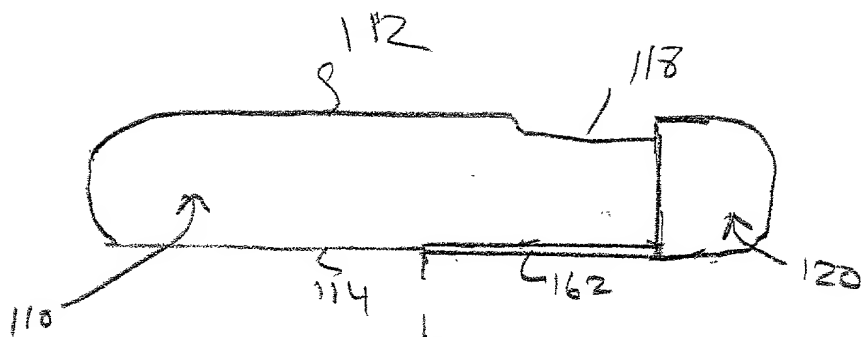


FIG. 10

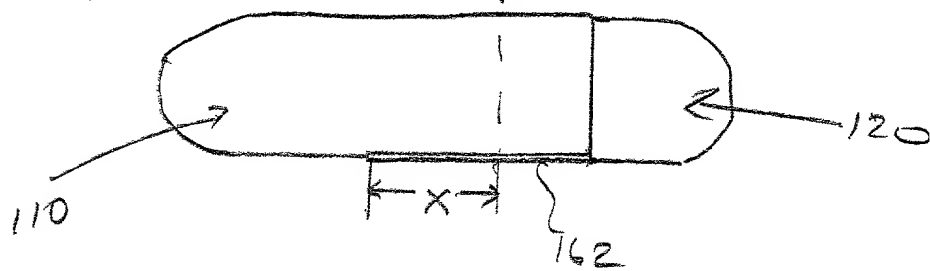


FIG. 11

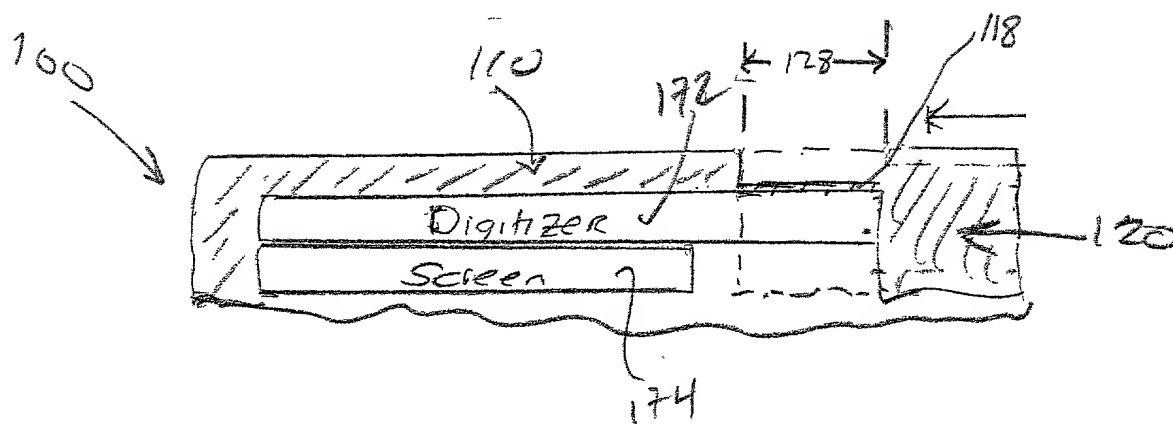


FIG. 12







FIG. 15

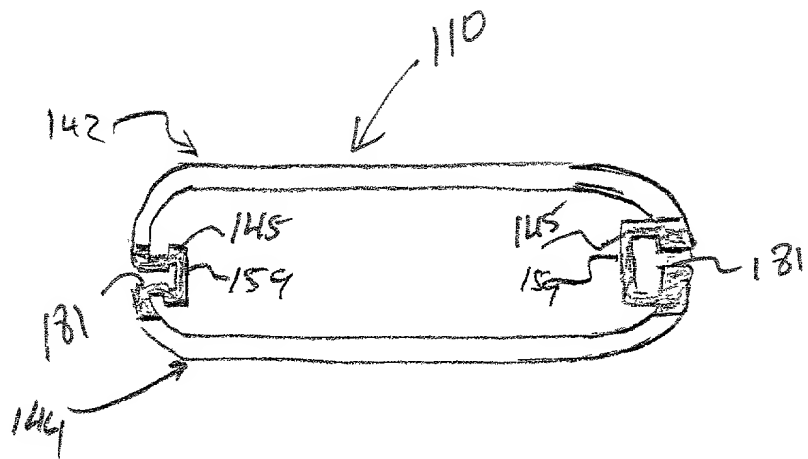
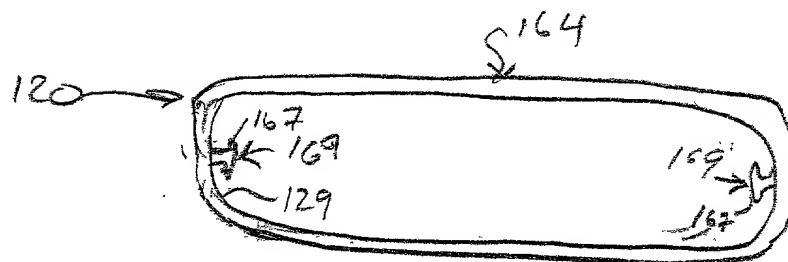


FIG. 16



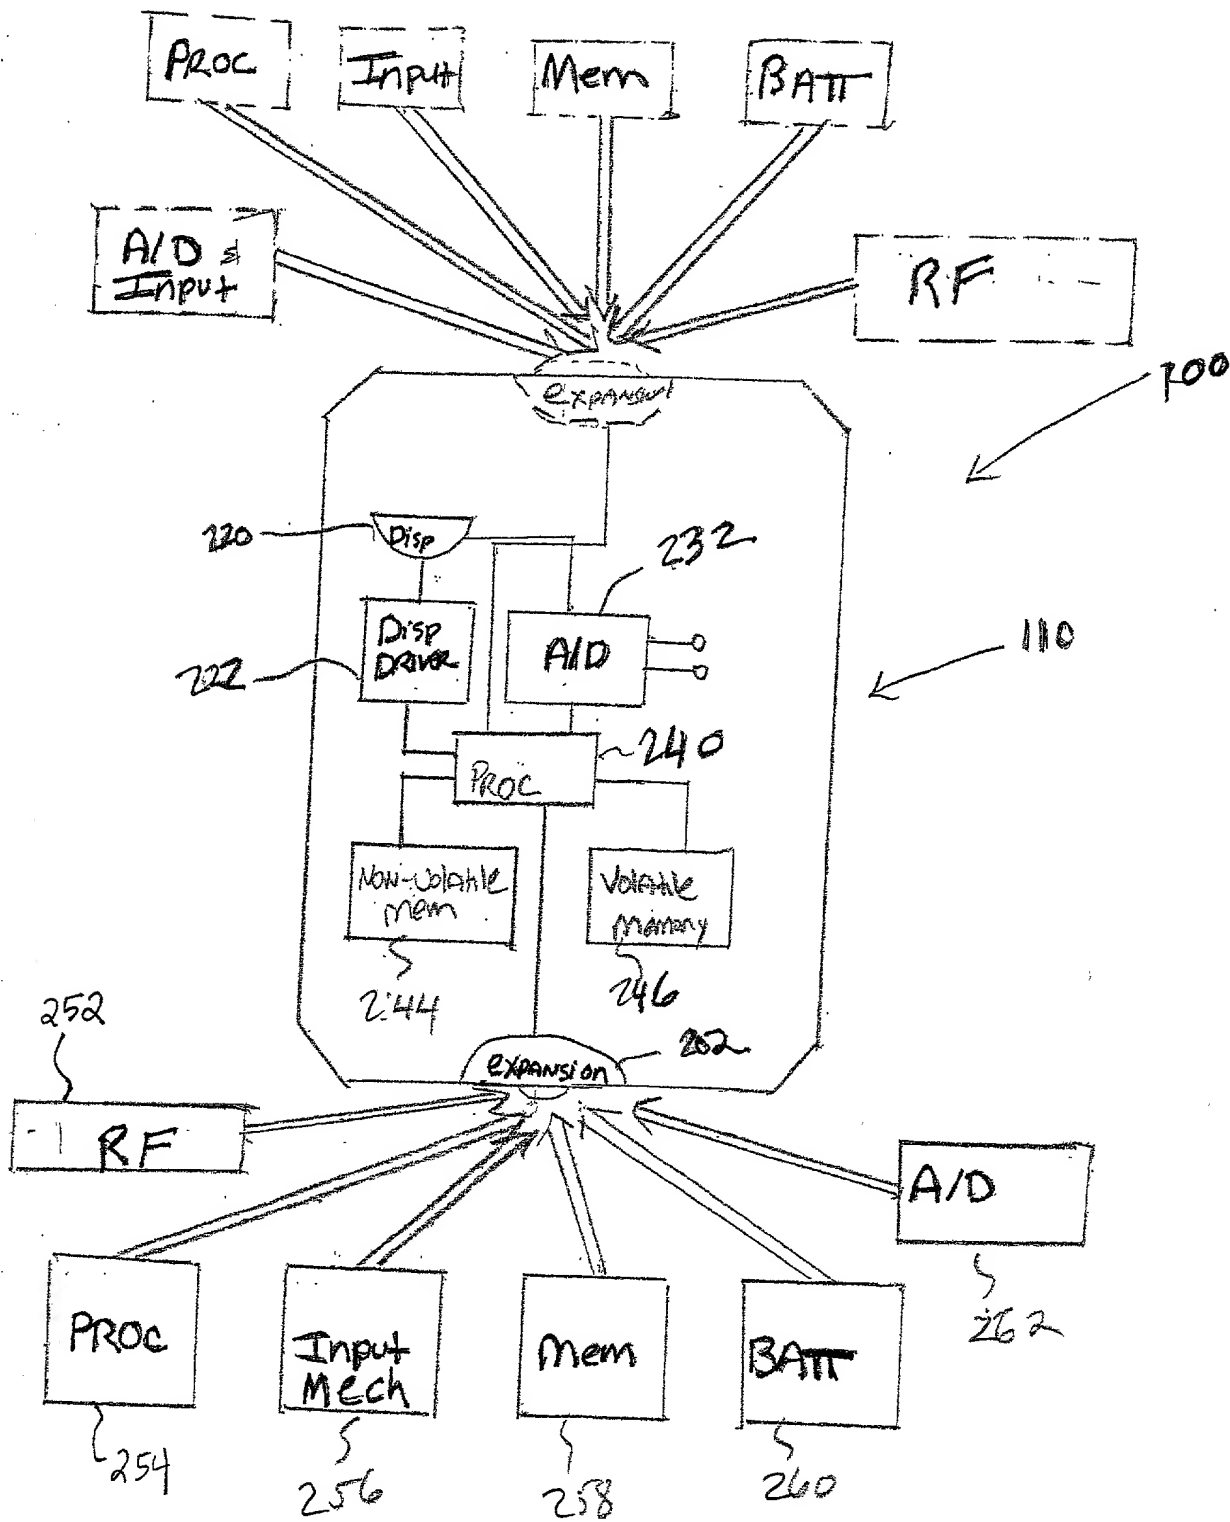


FIG 17